



Deco Tile 마이 플로어



SQUARE

Specification of Luxury Vinyl Tile	
Thickness	3mm
Wear Layer	0.1mm
Dimension Size	470mm x 470mm
Surface Treatment	UV coating
Packaging	15pcs or 35.7sqft per box
Country of Origin	South Korea



CERTIFIED BY
SCS Global Services



가용안전확인인증번호: B071H005-3001
비문물류 신고확인인증번호: B071H005-3001



KSM3802
규격명: PVC(비닐)계 바닥재
인증기관: 한국표준협회



9001:2015




14001

SV-3012




SV-3033

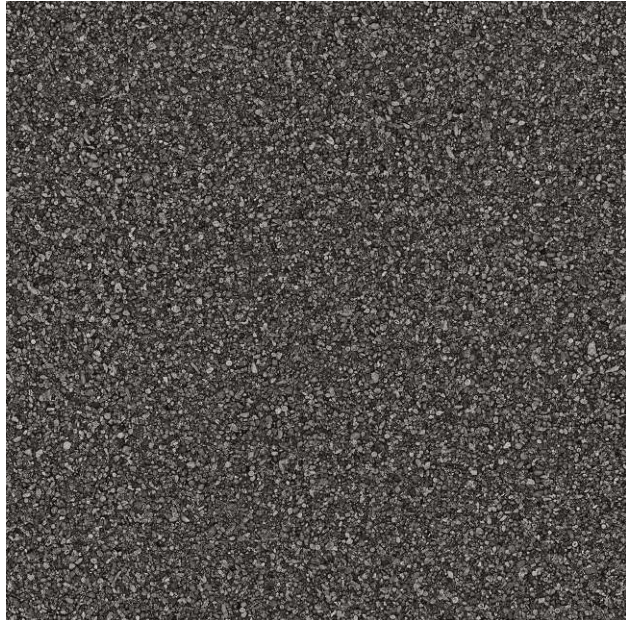

SV-3042



SV-3612

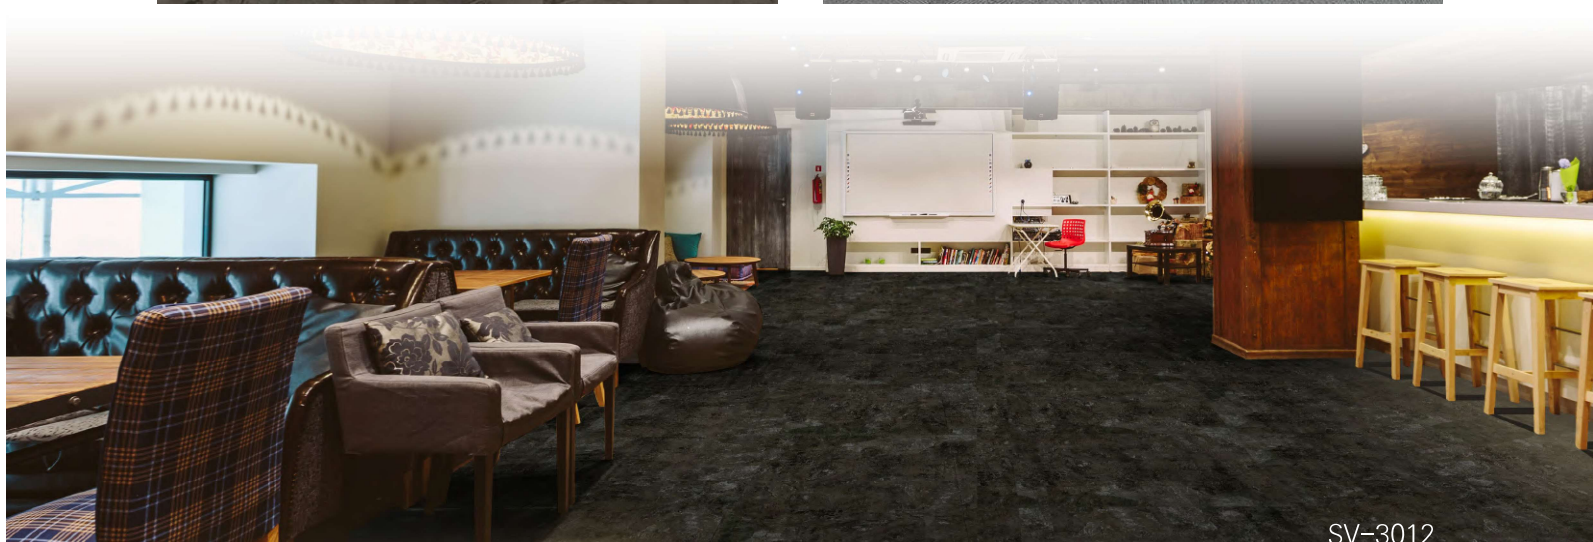

SV-3012

SV-3613



SV-3083



SV-3005




SV-3081






SV-3005



Code : SV-3012
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft

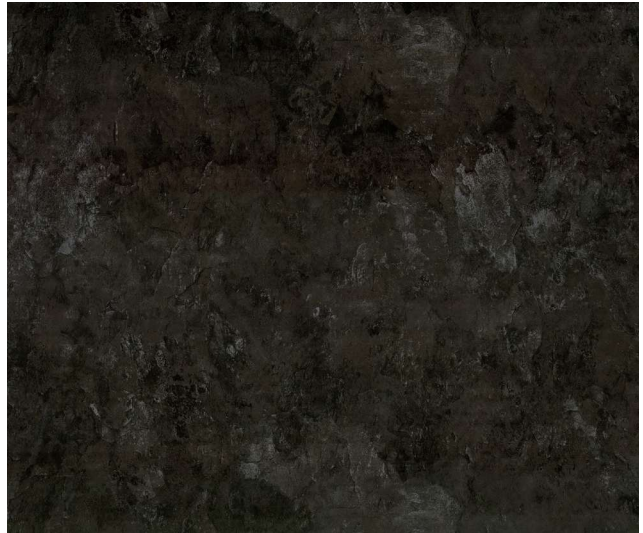

Code : SV-3033
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft

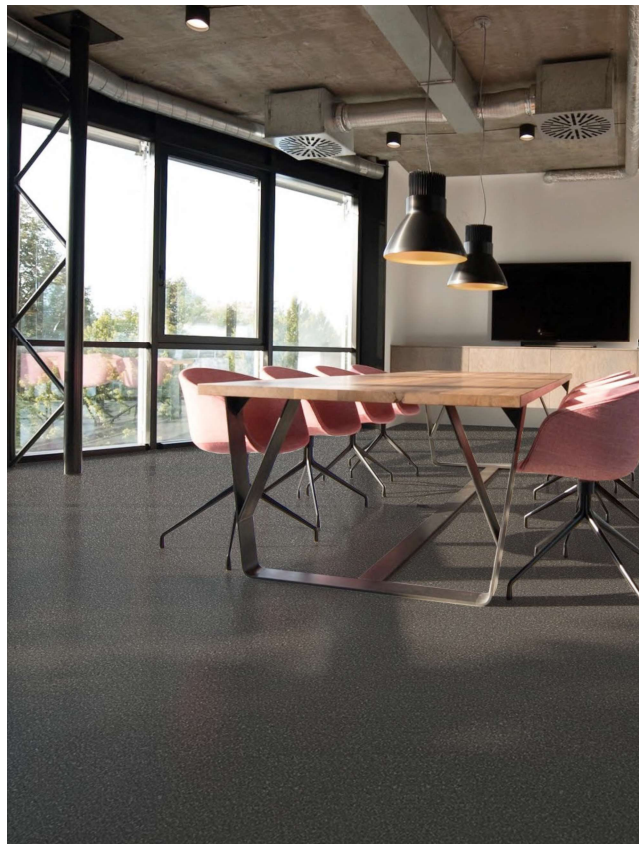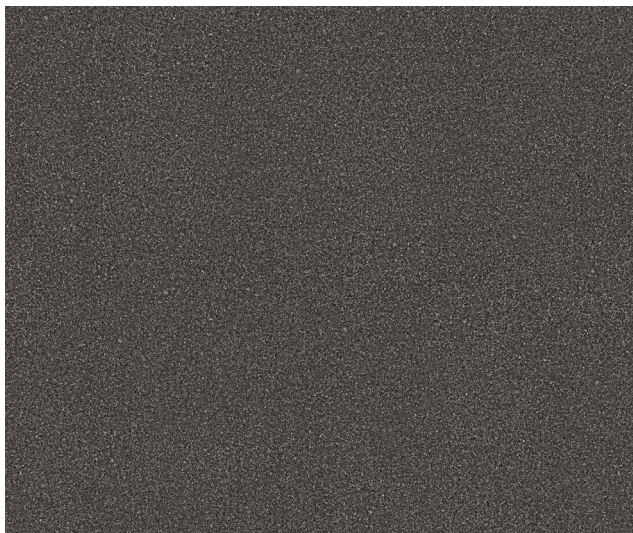



Code : SV-3042
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft



Code : SV-3612
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft







Code : SV-3613
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft



Code : SV-3083
 Thickness : 3mm
 Size : 470x470x3mm
 Packing per box : 15PCS / 35.7sqft


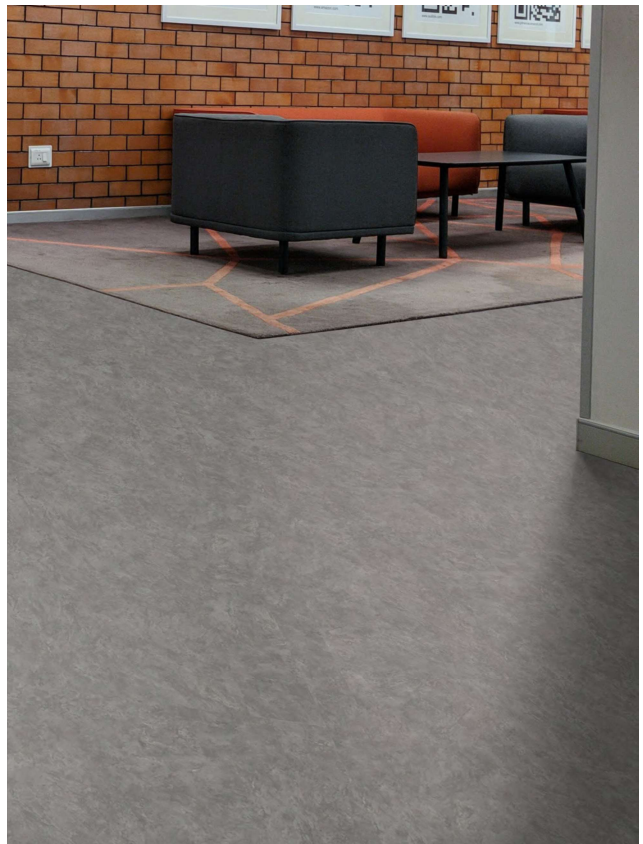
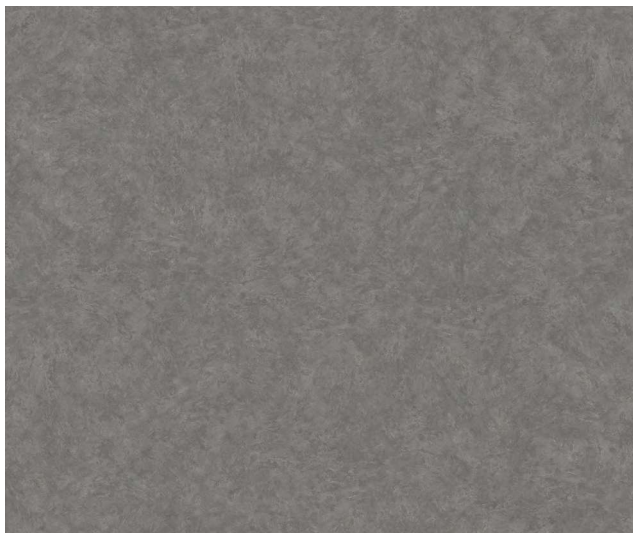




Code : SV-3005
Thickness : 3mm
Size : 470x470x3mm
Packing per box : 15PCS / 35.7sqft



Code : SV-3081
Thickness : 3mm
Size : 470x470x3mm
Packing per box : 15PCS / 35.7sqft

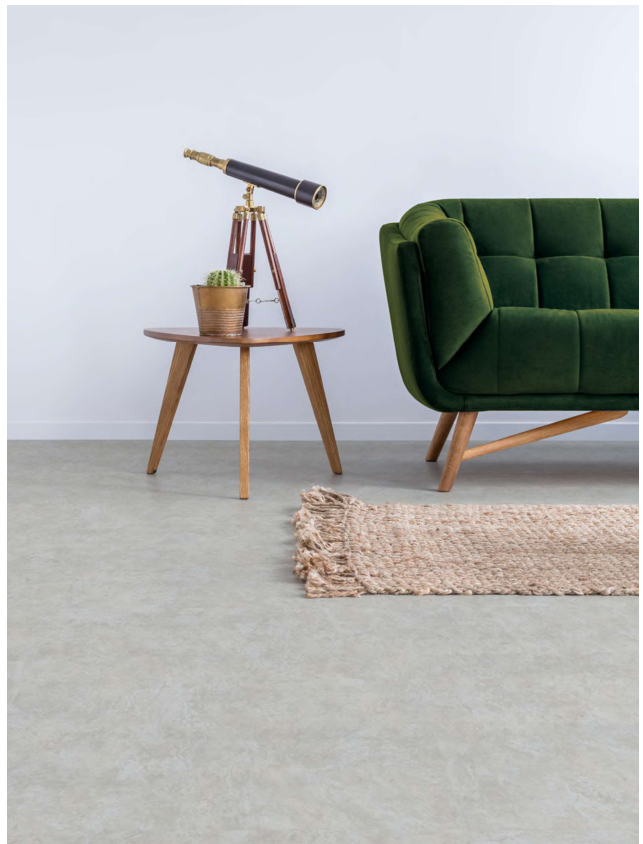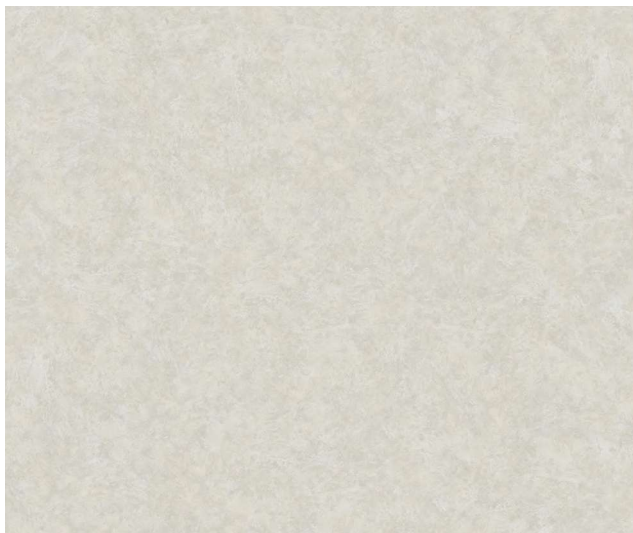



Deco Tile 마이 플로어



WOOD PLANK

Specification of Luxury Vinyl Tile	
Thickness	3mm
Wear Layer	0.1mm
Dimension Size	184mm x 950mm
Surface Treatment	UV coating
Packaging	19pcs or 35.8sqft per box
Country of Origin	South Korea



CERTIFIED BY
SCS Global Services



가용한정제인인고성능판호:
비문물용 신고제인문번호:66714005-3001



KSM3802
규격명: PVC(비닐)계 바닥재
인증기관: 한국표준협회



PV-3025



PV-3114



PV-3011



PV-3073



PV-3071



PV-3045



PV-3110



PV-3036




PV-3145



PV-3714



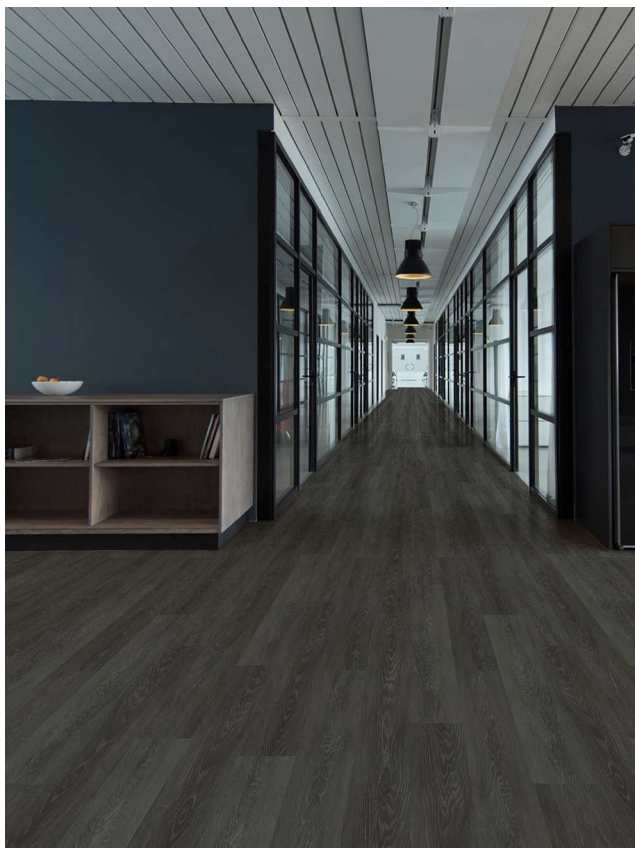

Code : PV-3025
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : PV-3114
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft







Code : PV-3011
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft




Code : PV-3073
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

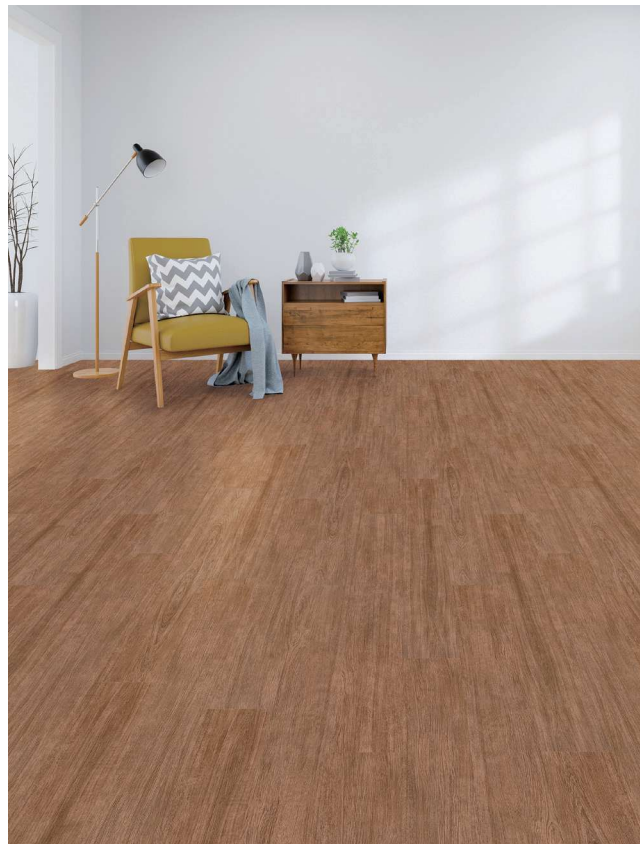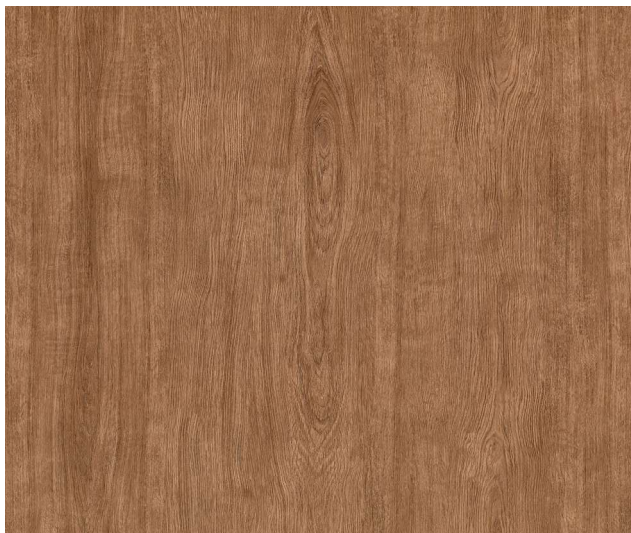




Code : PV-3071
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

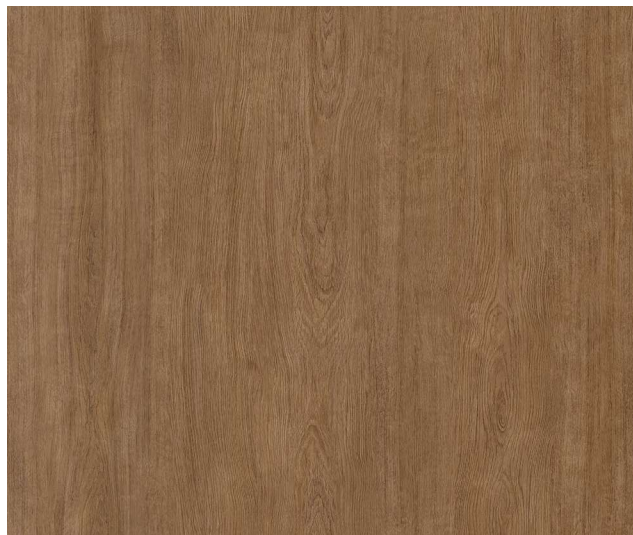

Code : PV-3045
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft


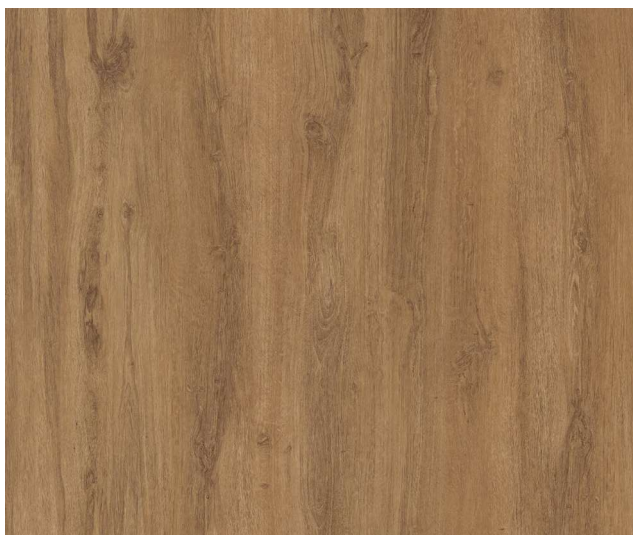




Code : PV-3110
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : PV-3036
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

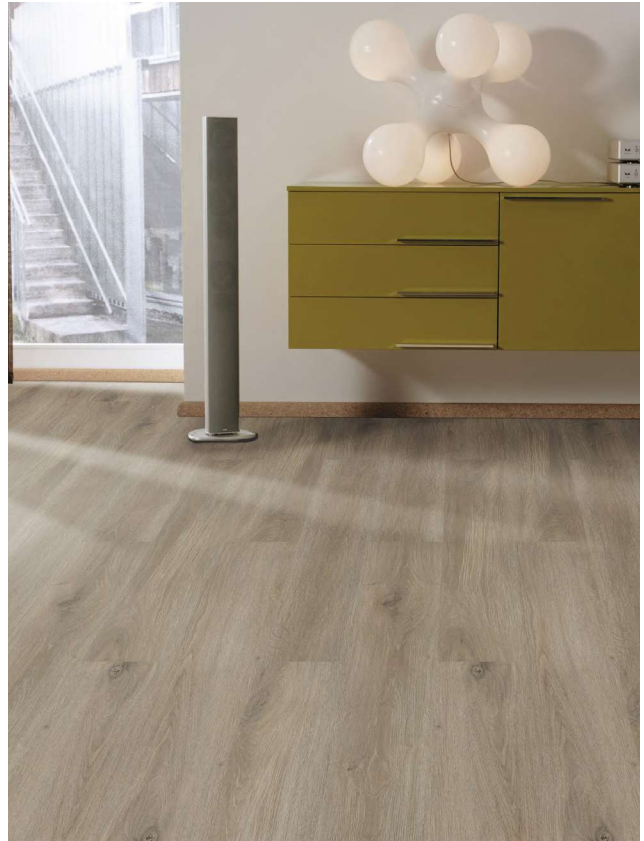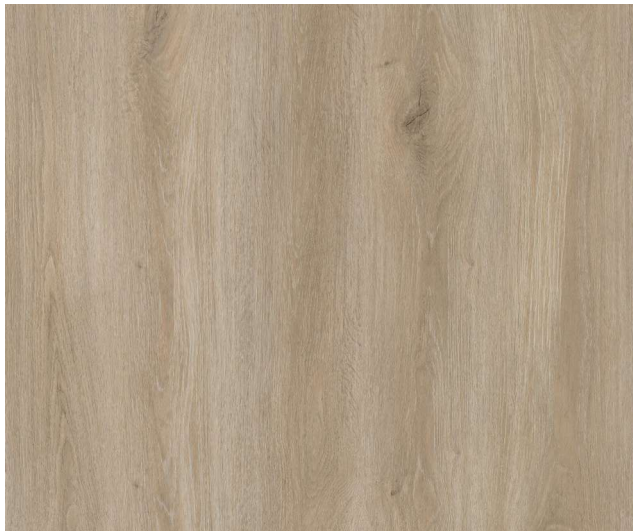



Code : PV-3145
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : PV-3714
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Technical Data		
Characteristics	Detection Method	Detection Result
Size		470mm x 470mm / 184mm x 950mm
Thickness		3mm
WearLayer		0.1 mm / 0.3 mm
Fire Resistance	EN13501-1 EN ISO 11925-2 EN ISO 9239-1	Bfl – S1 Pass Pass
Chemical Resistance	EN 423 ASTM F 925	Class 0 Pass
Wear Resistance Test Weight (500g), Sheet (AA180), Rotational frequency (500times)	EN 660-2	Wear Group : T
Color Fastness	EN ISO 105-B02 ASTM F 1515	≥ 6 < 8
Pressure (mm) 20°C / 45°C	EN 433 ASTM F 1914	≤ 0.1 mm < 8 %
Dimensional Change Rate by heat(%)	EN 434 ASTM F 2199	≤ 0.25 % Pass
ISO Certifications		Iso 9001 Iso 14001

