

★ PREMIUM ★
COLLECTION



Deco Tile 마이 플로어



WOOD PLANK

Specification of Luxury Vinyl Tile	
Thickness	3mm
Wear Layer	0.3mm
Dimension Size	184mm x 950mm
Surface Treatment	UV coating
Packaging	19pcs or 35.8sqft per box
Country of Origin	South Korea



CERTIFIED BY
SCS Global Services



기술안전확인신고필증번호:
비온돌용 신소재인물번호:B671H005-3001



KSM3802
규격명:PVC(비닐)계 바닥재
인증기관:한국표준협회



RV-33103



RV-33115



RV-33045



RV-33047



RV-33003



RV-33071



RV-33024



RV-33088






Code : RV-33103
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : RV-33115
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

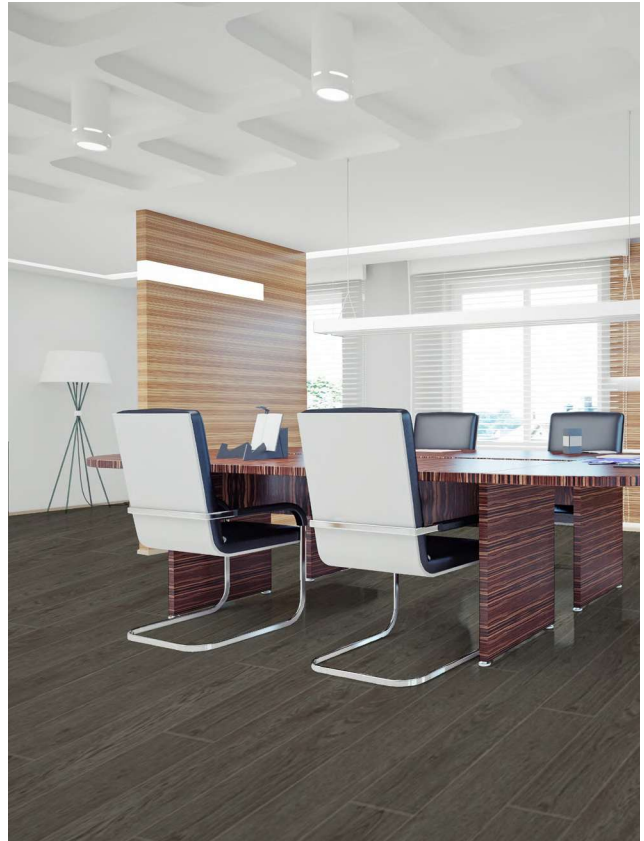




Code : RV-33045
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : RV-33047
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

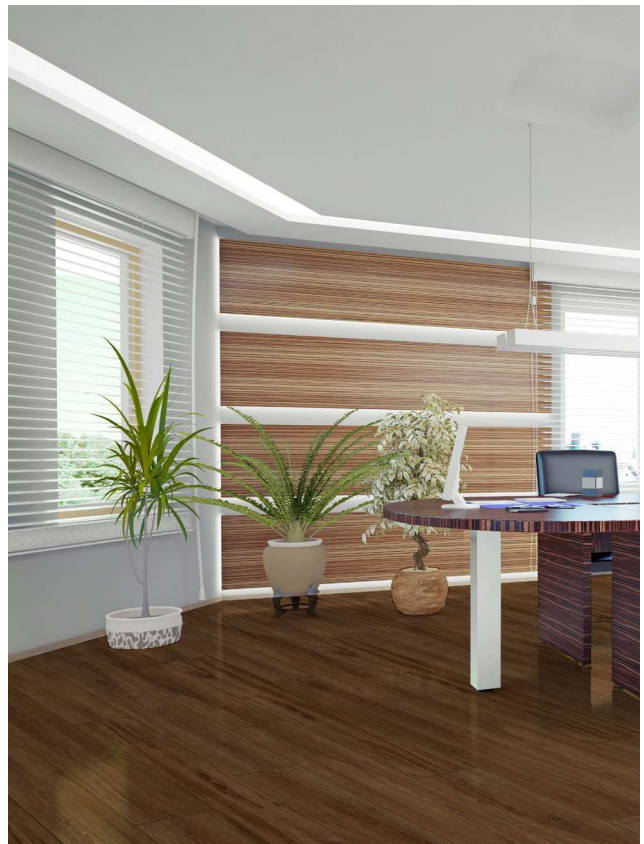




Code : RV-33003
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : RV-33071
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

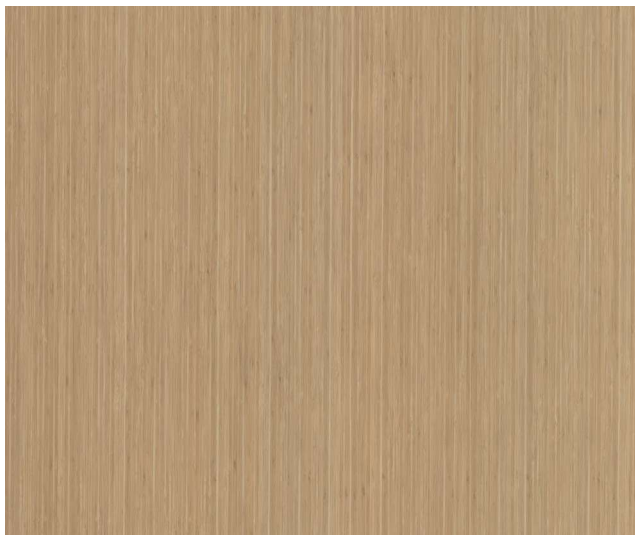




Code : RV-33024
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft



Code : RV-33088
 Thickness : 3mm
 Size : 184x950x3mm
 Packing per box : 19PCS / 35.8sqft

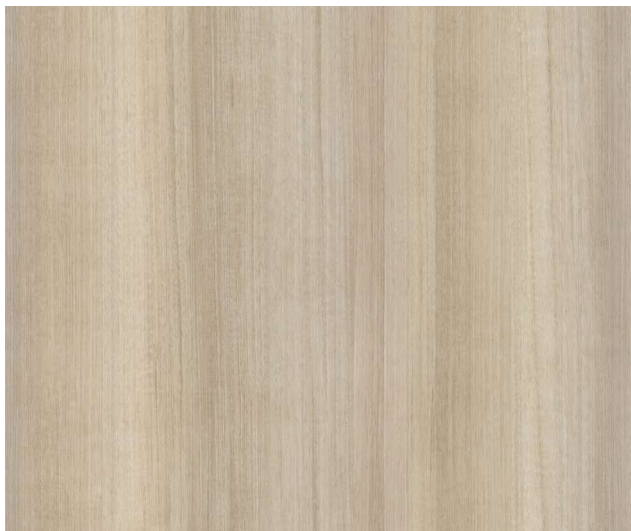

Technical Data		
Characteristics	Detection Method	Detection Result
Size		470mm x 470mm / 184mm x 950mm
Thickness		3mm
WearLayer		0.1 mm / 0.3 mm
Fire Resistance	EN13501-1 EN ISO 11925-2 EN ISO 9239-1	Bfl – S1 Pass Pass
Chemical Resistance	EN 423 ASTM F 925	Class 0 Pass
Wear Resistance Test Weight (500g), Sheet (AA180), Rotational frequency (500times)	EN 660-2	Wear Group : T
Color Fastness	EN ISO 105-B02 ASTM F 1515	≥ 6 < 8
Pressure (mm) 20°C / 45°C	EN 433 ASTM F 1914	≤ 0.1 mm < 8 %
Dimensional Change Rate by heat(%)	EN 434 ASTM F 2199	≤ 0.25 % Pass
ISO Certifications		Iso 9001 Iso 14001

